

PART G-01 ~ G-38

Diameter

● Shielded ○ non-Shielded

Switching Distance Sn mm

Housing Material

● With LED ○ Without LED

Dimensions (unit: mm)

Operating Voltage

Ripple

No Load Current

Max. Load Current

Leakge Current

Surge Current

Min. Load Current

Voltage Drop

Switching Frequency

Response Time

Switching Hysteresis

Repeat Accuracy

Protection Category

Operating Temperature

Temperature Drift

Short Circuit Protection

Overload Trip Point

Time Delay Before Availability

EMC

Shock / Vibration

Material Active Face

DC 3 wire 10-30V NPN N.O.

DC 3 wire 10-30V NPN N.C.

DC 3 wire 10-30V PNP N.O.

DC 3 wire 10-30V PNP N.C.

DC 4 wire 10-30V Changeover PNP (N.O. & N.C.)

DC 4 wire 10-30V Changeover NPN (N.O. & N.C.)

DC 2 wire 10-60V N.O.

DC 2 wire 10-60V N.C.

DC 3 wire 10-55v NPN N.O. or NAMUR

DC 3 wire 10-55v NPN N.C.

DC 3 wire 10-55v PNP N.O.

DC 3 wire 10-55v PNP N.C.

DC 3 wire 5-36V NPN N.O.

DC 3 wire 5-36V NPN N.C.

DC 3 wire 5-36V PNP N.O.

DC 3 wire 5-36V PNP N.C.

DC 4 wire 5-36V Changeover PNP (N.O & N.C.)

DC 4 wire 5-36V Changeover NPN (N.O & N.C.)

Remark

Cable 2M (PVC)

Weight

Please put each catalog page in the blank. The specification on the left will help your reading.

DC SHORT BODY WITH LONG SENSING DISTANCE PROXIMITY SWITCH

[illegible][illegible][illegible]


Approx.42 g

3 ϕ 3x0.15
Approx. 45 g

3 ϕ 3X0.15
Approx.35 g

DC SHORT BODY WITH LONG SENSING DISTANCE PROXIMITY SWITCH

Q8
●
3 mm
die-cast
●

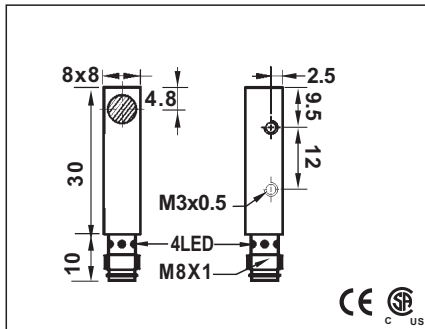


10-30VDC
<10%
<10mA
200mA
<0.01mA
-
-
<2.0V
1KHZ
0.1ms/0.1ms
<15%(Sr)
<2.0%(Sr)
IP67
-25°C - +70°C
<10%(Sr)
YES
220mA
<10ms
RFI>3V/m / EFT>1KV / ESD>4KV (contact)
IEC 60947-5-2,Part 7.4.1 / IEC 60947-5-2,Part 7.4.2
POM

[illegible]

Approx.25 g

M12	
	
6 mm	10 mm
nickel plated brass	
	

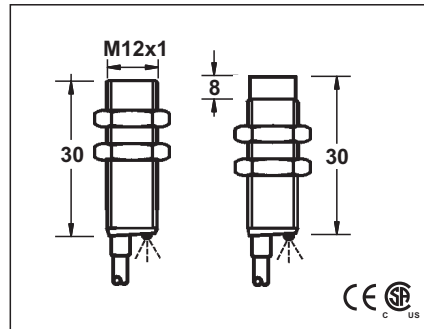


10-30VDC
<10%
<10mA
200mA
<0.01mA
-
-
<2.0V
1KHZ
0.1ms/0.1ms
<15%(Sr)
<2.0%(Sr)
IP67
-25 °C - +70 °C
<10%(Sr)
YES
220mA
<10ms
RFI>3V/m / EFT>1KV / ESD>4KV (contact)
IEC 60947-5-2,Part 7.4.1 / IEC 60947-5-2,Part 7.4.2
POM

[illegible]

4φ 3x0.15	
Approx.25 g	Approx.23 g

M12	
	
6 mm	10 mm
nickel plated brass	
	

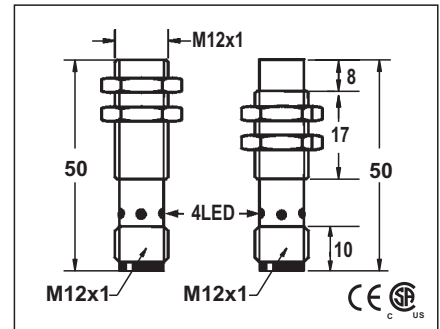


10-30VDC
<10%
<10mA
200mA
<0.01mA
-
-
<2.0V
1KHZ
0.1ms/0.1ms
<15%(Sr)
<2.0%(Sr)
IP67
-25 °C - +70 °C
<10%(Sr)
YES
220mA
<10ms
RFI>3V/m / EFT>1KV / ESD>4KV (contact)
IEC 60947-5-2,Part 7.4.1 / IEC 60947-5-2,Part 7.4.2
POM

[illegible]

Approx.25 g	Approx.23 g

DC SHORT BODY WITH LONG SENSING DISTANCE PROXIMITY SWITCH

M18	
	
12 mm	20 mm
nickel plated brass	
	

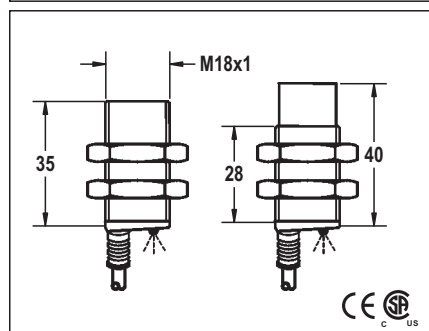


10-30VDC or 10-60VDC
<10%
<10mA
200mA
<0.01mA
-
-
<2.0V
1KHZ
0.1ms/0.1ms
<15%(Sr)
<2.0%(Sr)
IP67
-25 °C - +70 °C
<10%(Sr)
YES
220mA
<10ms
RFI>3V/m / EFT>1KV / ESD>4KV (contact)
IEC 60947-5-2,Part 7.4.1 / IEC 60947-5-2,Part 7.4.2
DOM

[illegible]

5.0 ϕ 44x0.1	
Approx.132 g	Approx.134 g


M18	
	
12 mm	20 mm
nickel plated brass	
	

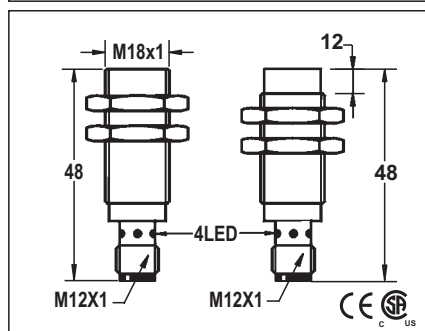

10-30VDC or 10-60VDC
<10%
<10mA
200mA
<0.01mA
-
-
<2.0V
1KHZ
0.1ms/0.1ms
<15%(Sr)
<2.0%(Sr)
IP67
-25 °C ~ +70 °C
<10%(Sr)
YES
220mA
<10ms
RFI>3V/m / EFT>1KV / ESD>4KV (contact)
IEC 60947-5-2,Part 7.4.1 / IEC 60947-5-2,Part 7.4.2
POM

[illegible][illegible]

M30	
	
22 mm	40 mm
nickel plated brass	
	

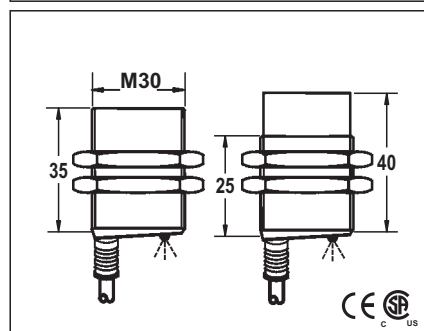

10-30VDC or 10-60VDC
<10%
<10mA
200mA
<0.01mA
-
-
<2.0V
1KHZ
0.1ms/0.1ms
<15%(Sr)
<2.0%(Sr)
IP67
-25 °C - +70 °C
<10%(Sr)
YES
220mA
<10ms
RFI>3V/m / EFT>1KV / ESD>4KV (contact)
IEC 60947-5-2,Part 7.4.1 / IEC 60947-5-2,Part 7.4.2
POM

[illegible]

5.8 ϕ 3x0.5	
Approx.180 g	Approx.182 g

DC SHORT BODY WITH LONG SENSING DISTANCE PROXIMITY SWITCH

[illegible][illegible][illegible]