
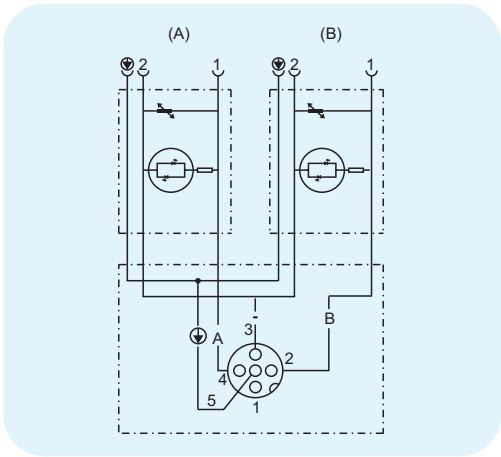
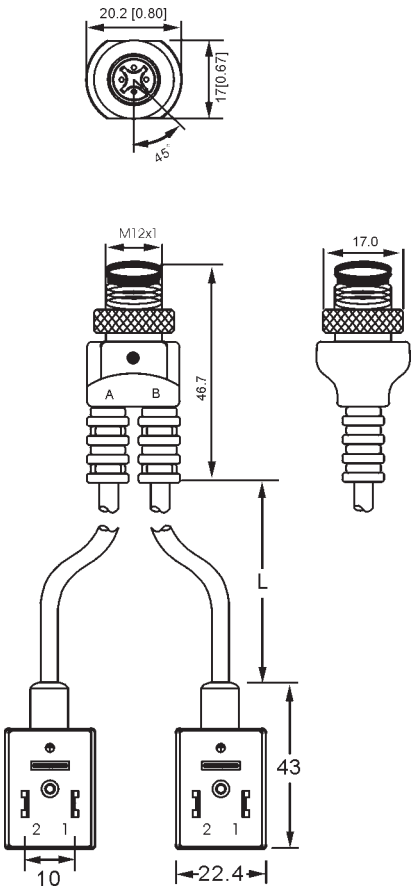
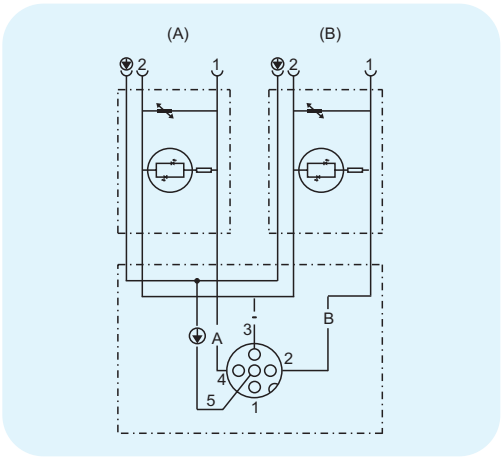


SPLITTERS WITH VALVE-CONNECTORS

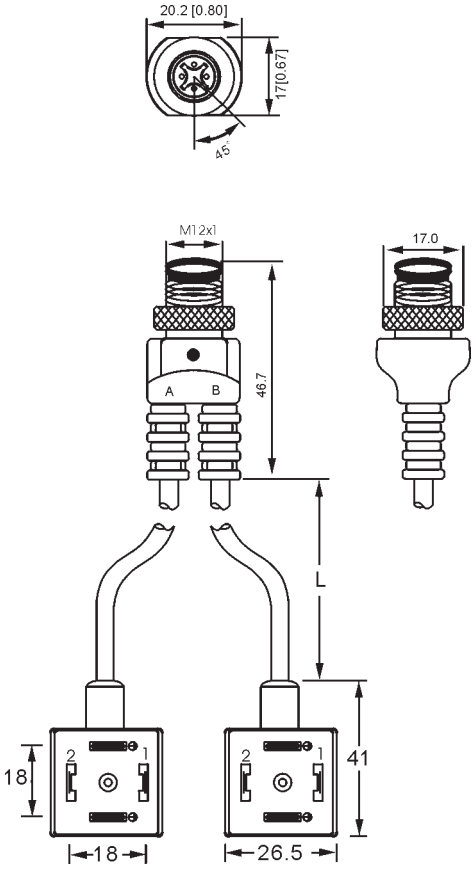

SPLITTERS WITH VALVE-CONNECTORS

Description

Micro Splitters with valve connectors
Variety of standard cable lengths
Outstanding resistance to oils and chemicals

Technical Data

1.Application Class: -25 °C to +90 °C

2.Materials:

Molded Body: PUR(Polyurethane),Orange
Contact: Brass, gold over nickel plating
Insert: PUR(Polyurethane),black
Coupling Nut: Brass,nickel plated
DIN Body: Polypropylene

3.Electrical Data:

Contact Resistance: $\leq 5m\ \Omega$
Current Rating 4A

Working Voltage: 10-30VDC(w/LED)

Insulation Resistance: $>10^9\ \Omega$



4.Mechanical Data:

Insertion Force (contact): $\leq 2.0N(.45LBS)$





Withdrawal Force (contact): $\geq 0.5N(.11LBS)$

Protection: Ip67, NEMA 6(only in fully locked position)

Order Information

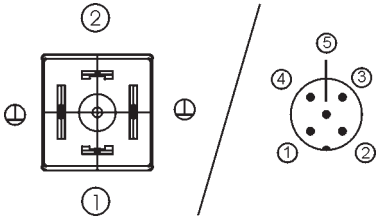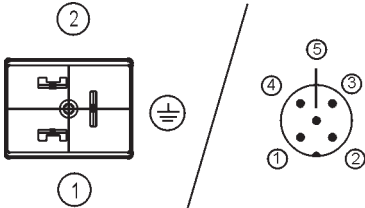Part Number	Face View	Description
U2-R5/3V-FANAVY052		Splitter with two Form A valve connectors, which featured with built-in LED and varistor for voltage protection, connected protective earth.
U2-R5/3V-FANAVV552		
U2-R5/3V-FAZBVY052		Splitter with two Form B valve connectors, which featured with built-in LED and varistor for voltage protection.
U2-R5/3V-FAZBVV552		
"L"=Standard length:2.0m,3.0m,5.0m,10.0m. other cable length or cable specifications on request.		

SPLITTERS WITH VALVE-CONNECTORS

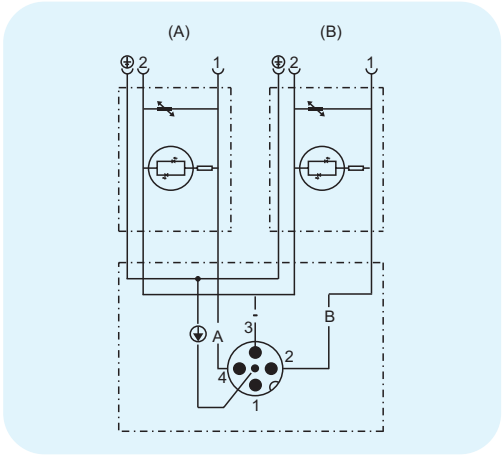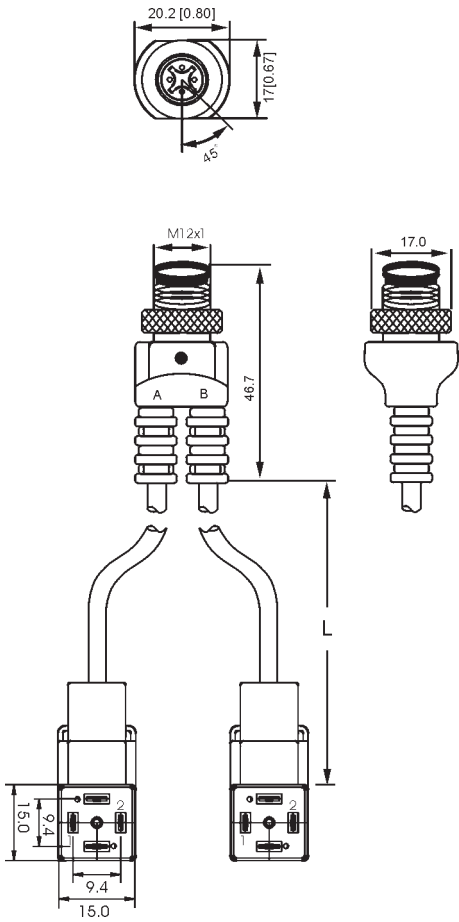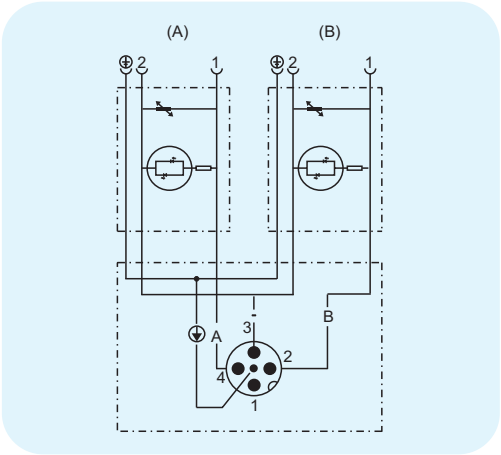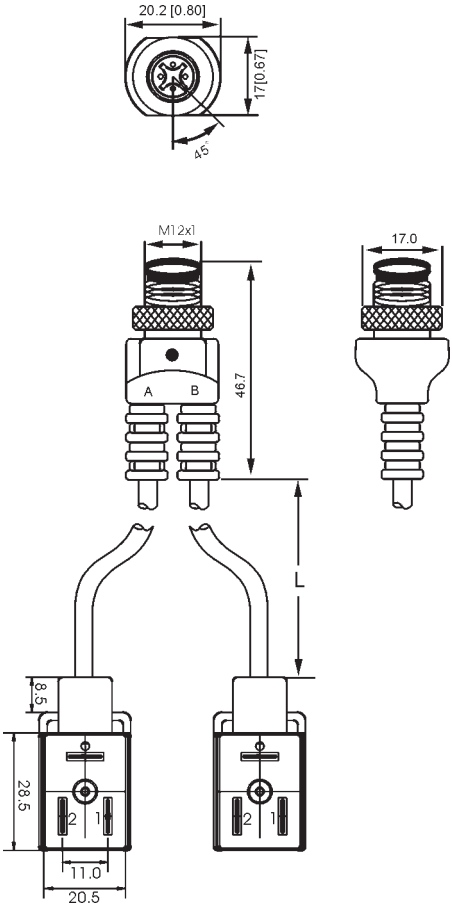

SPLITTERS WITH VALVE-CONNECTORS



Description

Micro Splitters with valve connectors
Variety of standard cable lengths
Outstanding resistance to oils and chemicals

Technical Data

1.Application Class:	-25 °C to +90 °C	Working Voltage:	10-30VDC(with LED)
2.Materials:		Insulation Resistance:	>10 ⁹ Ω
Molded Body:	PUR(Polyurethane),Orange	4.Mechanical Data:	
Contact:	Brass, gold over nickel plating	Insertion Force	
Insert:	PUR(Polyurethane),black	(contact):	≤ 2.0N(.45LBS)
Coupling Nut:	Brass,nickel plated	Withdrawal Force	
DIN Body:	Polypropylene	(contact):	≥ 0.5N(.11LBS)
3.Electrical Date:		Protection:	Ip67, NEMA 6(only in fully locked position)
Contact Resistance:	≤ 5m Ω		
Current Rating	4A		

Order Information

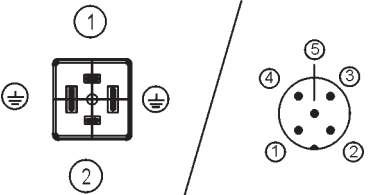Part Number	Face View	Description
U2-R5/3V-FAZDVY052		Splitter with two Form B valve connectors, which featured with built-in LED and varistor for voltage protection, connected protective earth.
U2-R5/3V-FAZDVV552		
U2-R5/3V-FANGVY052		Splitter with two Form C valve connectors, which featured with built-in LED and varistor for voltage protection, connected protective earth.
U2-R5/3V-FANGVV552		
"L"=Standard length:2.0m,3.0m,5.0m,10.0m. other cable length or cable specifications on request.		