


Features


- Digital LCD display, easy readout
- IP65 enclosure
- Detection distance : 0.01 ~ 0.10 mm
- Repeatability : $\pm 5 \mu\text{m}$

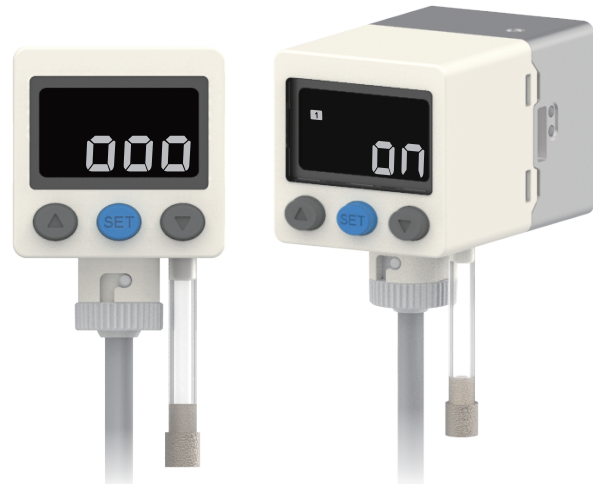

Features Highlight

1 Easy to Check Workpiece Located on the Right Place

- Intuitive recognize in graphic interface, easy to check the gap between workpiece and platform.

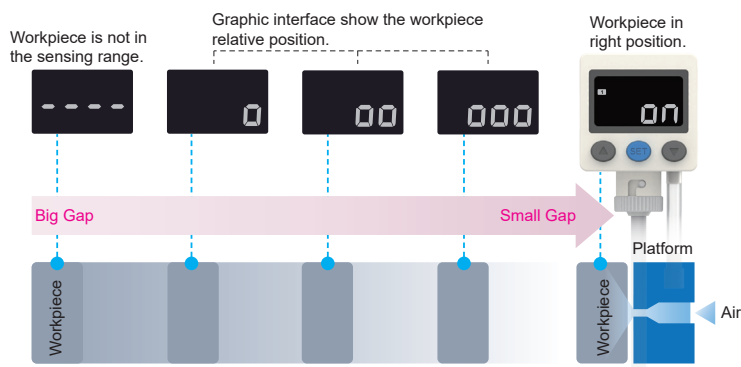


2 IP65 Compliance




3 Reference Gap Easy Setting

- To set the reference gap by press up $\triangle$ + down ∇ at the same time.

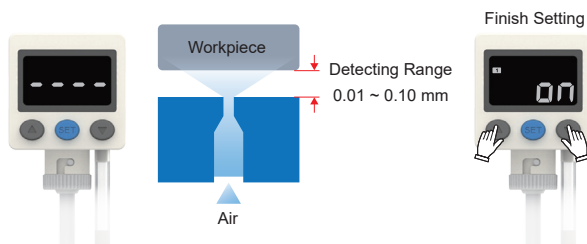


4 Repeatability : $\pm 5 \mu\text{m}$

- The higher repeatability is, the more guarantee is.

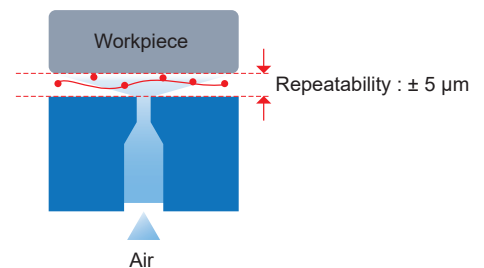

5 The Gap Cause by Shavings Can Be Detectable

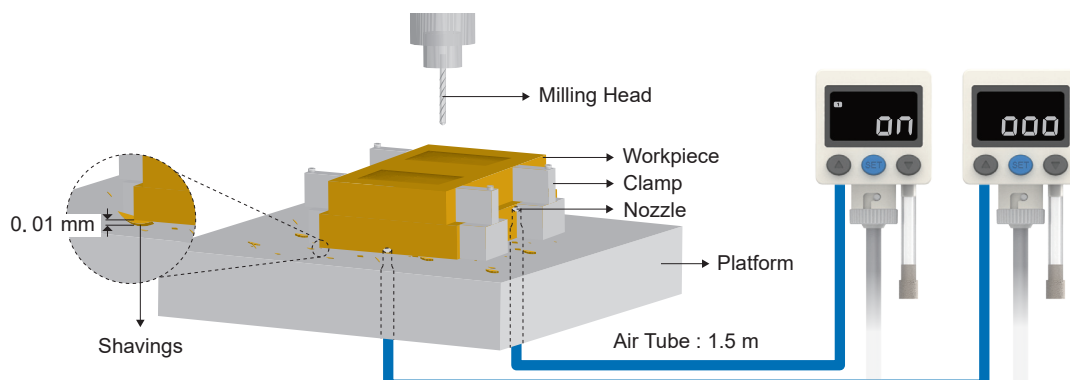




Specifications

MODEL		KGS01-G-02	KGS01-G-04
Detection Distance		0.01 ~ 0.10 mm	
Operating Pressure Range		250 ~ 350 kPa	
Withstand Pressure		600 kPa	
Fluid		Clean air, Non-corrosive / Non-flammable gas ※1	
Power Supply Voltage		12 ~ 24 V DC ± 10 %, Ripple (P-P) ≤ 10 %	
Current Consumption		≤ 20 mA	
Switch Output		1 NPN : open collector 1 output Max. Load Current : 125 mA Max. Supply Voltage : 30 V DC Residual Voltage : ≤ 1.5 V	1 PNP : open collector 1 output Max. Load Current : 125 mA Max. Supply Voltage : 24 V DC Residual Voltage : ≤ 1.5 V
Consumption Flow Rate		≤ 16 L / min @ 300 kPa	
Repeatability		± 5 μm	
Hysteresis		Adjustable 1 ~ 30 digits	
Output Short Circuit Protection		Yes	
Display		3 ½ digital, 7 segment LCD display (White) (Sampling rate : 5 times / sec.)	
Switch on Indicator		White Indicator 1 : OUT1	
Detection Nozzle		Ø1.5 mm ※2	
Environment	Enclosure	IP65 ※3	
	Ambient Temp. Range	Operation : 0 ~ 50 °C, Storage : -10 ~ 60 °C (No condensation or freezing)	
	Ambient Humidity Range	Operation / Storage : 35 ~ 85 % RH (No condensation)	
	Withstand Voltage	1000 V AC in 1-min (between case and lead wire)	
	Insulation Resistance	≥ 50 MΩ (at 500 V DC, between case and lead wire)	
	Vibration	Total amplitude 1.5 mm or 10 G, 10 Hz ~ 55 Hz ~ 10 Hz scan for 1 minute, 2 hours each direction of X, Y and Z	
	Shock	100 m/s² (10 G), 3 times each in direction of X, Y and Z	
Piping Specifications	Supply Port	Rc1/8" ※4	
	Detection Port		
Lead Wire		Ø4 Oil-resistance cable (PVC) - 26 AWG (0.15 mm²) - 3 cores	
Weight (with 2 meter lead wire)		Approx. 115 g	

NOTE

※1 : Please use air filter to clean air (5 μ m or less) and install precision regulator.


※2 : Detection nozzle

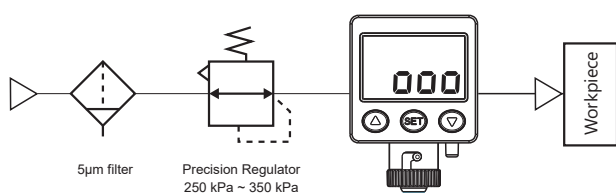


※3 : Dustproof protector must be installed to maintain IP65.

※4 : Back side of product, please refer to product dimension.

Detection Circuit

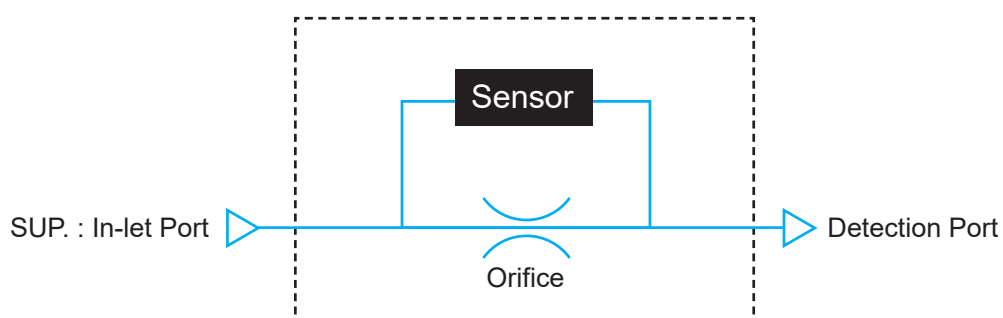


Panel Description

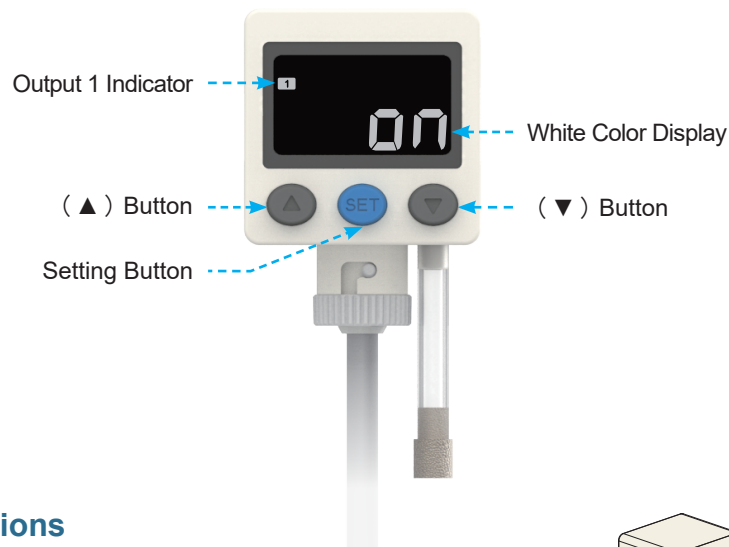

Installation Precautions

- When mounting, always use the wrench on the metallic area near the pressure port. Never apply a wrench to the plastic body, it will damage the sensor.
- Over tightening may cause damages to the port thread, mounting bracket and pressure sensor. Under tightening may result loosen or leakage.




※ Internal Hex Straight Tube-to-Tube Adaptors are recommended.

Circuit Wiring Diagrams


KGS01 - G - 02

1 NPN Output

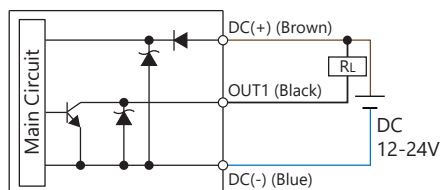

KGS01 - G - 04

1 PNP Output

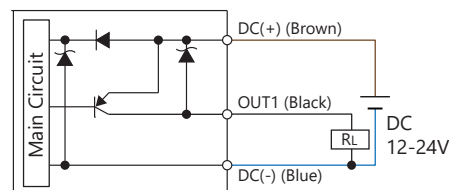

Ordering Information

K G S 0 1 - G - 0 2 - F 1 C

Rated Distance Range

G : 0.01 ~ 0.10 mm

Output Specifications

02 : 1 NPN Output
04 : 1 PNP Output

Pressure Port

F1C : Rc1/8"

Optional Parts


BT-18 : Mounting bracket
BT-19 : Mounting bracket
PA-E : Panel adapter
PA-F : Panel adapter + Front protective lid

Optional Parts


■ Mounting bracket : BT-18 / BT-19

■ Panel adapter : PA-E

■ Panel adapter + Front protective lid : PA-F




Dimensions

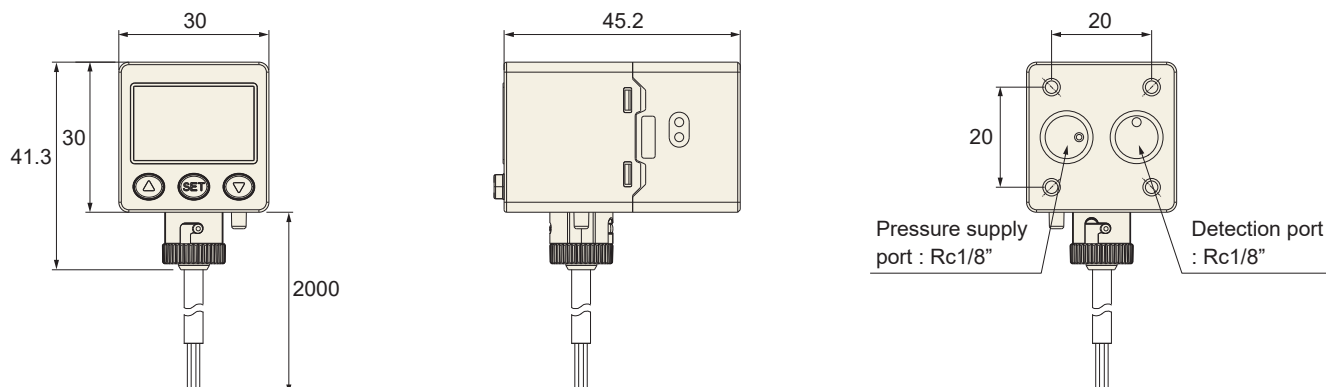


Optional Parts Dimensions


1 Mounting Bracket

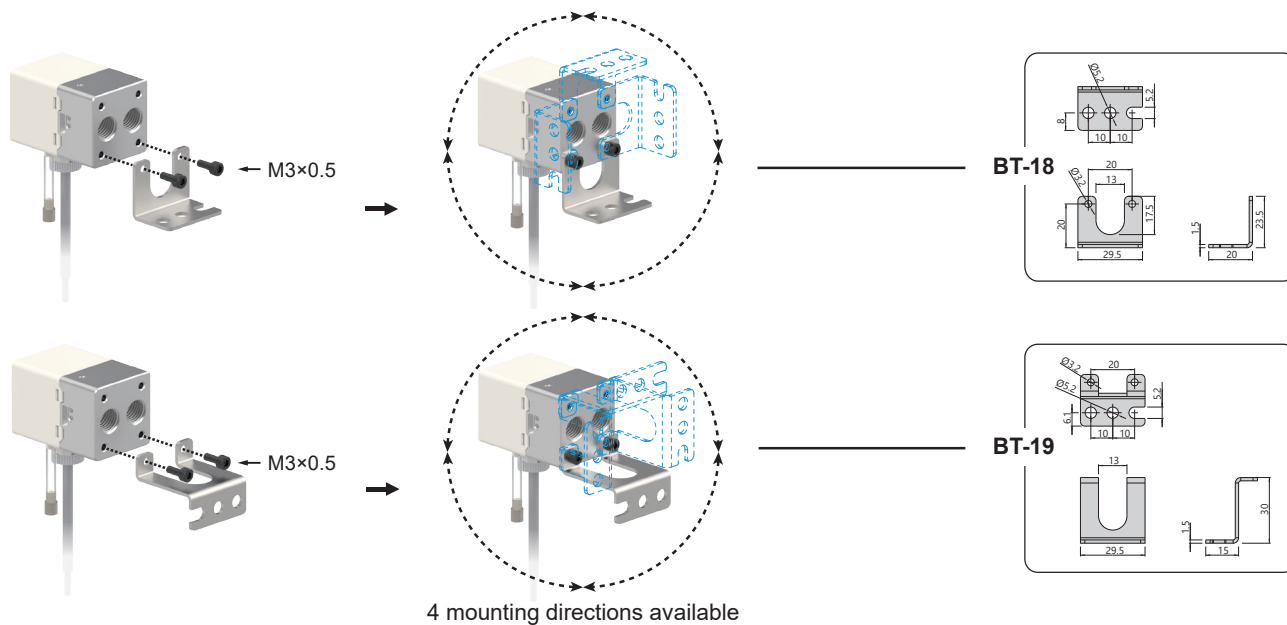

2 Panel Mount Adapter + Front Protective Lid

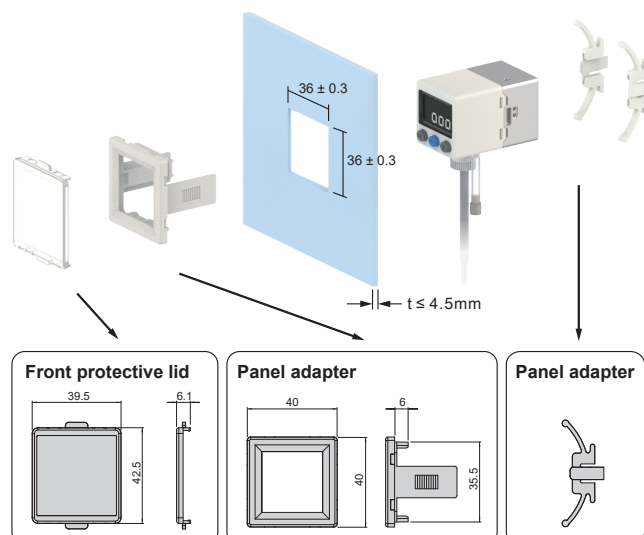

3 IP65 Protector

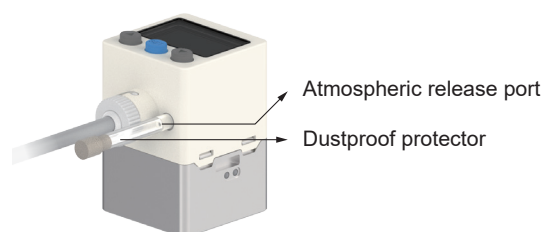

Caution :

This device must be installed to maintain IP65 (Dust and splash proof) enclosure rating.

Unit : mm