


Unit: mm



Type	T18-T100MD-EY1C2L2
Sensing distance	100 m
Light source	Red laser diode class 1
Switching frequency	-
Switching hysteresis	-
Operating voltage	10-30 V DC
Voltage drop	-
Max load current	-
No load current	≤ 30 mA
Leakage current	-
Short circuit protection	No
Reverse polarity protection	Yes
Output mode	-
Output indication	Red LED
Mechanical specifications	PBT
Protection classification	IP67
Operating temperature	-25°C -70°C
EMC	EN IEC 61000-6-1:2019
	EN IEC 61000-6-3:2021
	EN IEC 61000-3-2:2019+A1:2021
	EN 61000-3-3:2013+A1:2019+A2:2021
Shock	IEC 60947-5-2, part 7.4.1
Vibration	IEC 60947-5-2, part 7.4.2
Connection	PVC Cable, 2 m

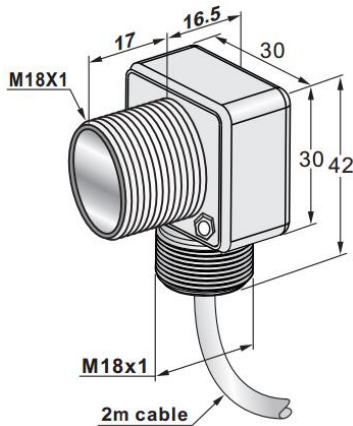