

HAW2000-5000 Filter Regulator HAW Series



HAW2000-5000 Filter Regulator HAW Series

Features:

- Compact size, light weight, good performance, easy use, charming appearance
- It adopts the modular connection, it may be used individually or by combination with easy installation.
- The embedded pressure gauge shortens the mounting time Semi-auto drain (water discharged automatically while air turned off) and fully auto drain for your selection
- The precision air regulator has fine flow-pressure characteristics. The knob with self - locking function is fit for any seismic environment


Ensured Pressure Resistance	1.5MPa(15kgf/cm ²)
Highest Working Pressure	1.0MPa(10kgf/cm ²)
Ambient and Fluid Temperature	5~60°C
Filter Precision	25μm
Container Material	Polycarbonate
Protective Cover	Available
Pressure Regulating Range	0.05~0.85MPa(0.5~8.5kgf/cm ²)
Valve Type	With Overflow

*5,50 μm available in addition

Model	Specifications				Accessories		Drain Function	Auto Drain Model
	Rated Flow(L/min)	Port Size(G)	Pressure Gauge Size(G)	Weight(kg)	Bracket	Pressure Gauge		
HAW2000-01	500	1/8	1/8	0.3	B220	G36-10-01	Manual Drain	
HAW2000-02		1/4						
HAW3000-02	2000	1/4	1/8	0.53	B320		a.Air shut off Drain b.Manual Drain	HAW3000-02D
HAW3000-03		3/8						HAW3000-03D
HAW4000-03	4000	3/8	1/4	1.15	G46-10-02	HAW4000-03D		
HAW4000-04		1/2				HAW4000-04D		
HAW4000-06	4500	3/4	1/4	1.19				HAW4000-06D
HAW5000-06	5500	3/4	1/4	1.78				HAW5000-06D
HAW5000-10		1					HAW5000-10D	

*Under the circumstance that the supply pressure is 0.7MPa(7.1kgf/cm²) and set pressure 0.5MPa(5.1kgf/cm²) Rc. and NPT port size are available.

外形尺寸图/Overall Dimension Drawing (mm)

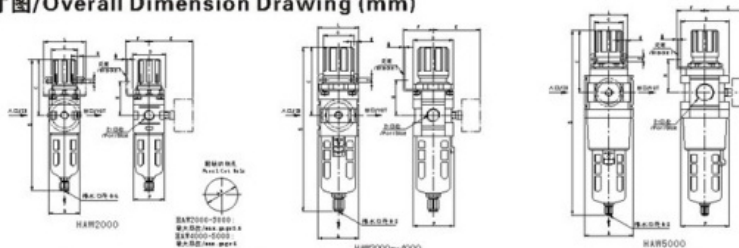

型 号Model	口径 Port Size G	A	B	C	D	E	F	G	H	J	K	L	M	P	N
HAW2000	1/8~1/4	40	180	78	40	56.8	30	34	43.5	5.4	15.4	55	2.3	40	33.5
HAW3000	1/4~3/8	53	218	92.5	53	60.8	39	40	46	6.5	8	53	2.3	56	42.5
HAW4000	3/8~1/2	70	269.5	112	70	70.5	49.2	54	53.5	8.5	10.5	70	2.3	73	52.5
HAW4000-06	3/4	75	273.5	114	70	70.5	49.2	54	55.5	8.5	10.5	70	2.3	73	52.5
HAW5000	3/4~1	90	346.5	116	90	75.5	49.2	54	62	8.5	10.5	70	2.3	90	52.5