


3 PCS PNEUMATIC BALL VALVE

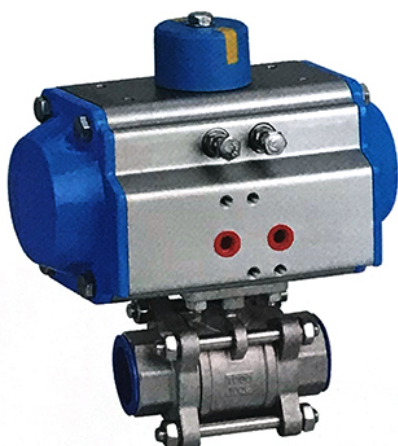

Technical Specification


- ✓ Size: 1/2"~4"(DN15~DN100)
- ✓ Explosion Proof Stem, Anti-static Design
- ✓ Shell Wall Thickness: ANSI B16.34 Class300
- ✓ Body: CF8/CF8M
- ✓ Ball: SS316
- ✓ Stem: SS316
- ✓ Seal Ring: PTFE
- ✓ Working Pressure: 1/2"~2" 1000psi
2"~1/2"~4" 800psi
- ✓ Temperature Range: -20~+180°C
- ✓ Manufacturing standard: GB, ISO, ANSI, BS, DIN

Options

- ✓ Pneumatic/Electrical
- ✓ Solenoid Valve
- ✓ Limit Switch Box
- ✓ Positioner

Size	Body Material	Trim Material	Valve Seat	Connection Style
1/2"~ 4"	CF8	316	PTFE	NPT
1/2"~ 4"	CF8M	316	PTFE	NPT

Overall Dimension

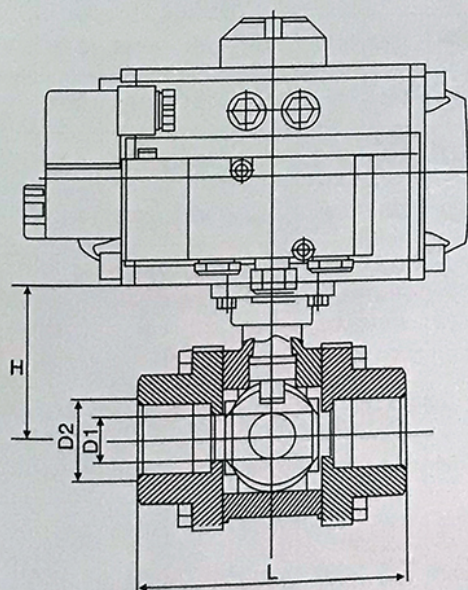

Dimension Sheet

DN	Size (mm)			
	L	D1	D2	H
15	75	15	21.8	42
20	80	20	27.3	49
25	90	25	34	58.5
32	110	32	42.8	63
40	120	38	48.9	71
50	140	50	61.4	78
65	185	63.5	74	100
80	205	76	90	109
100	240	100	115.4	140