


ELECTICAL WAFER BUTTERFLY VALVE



Technical Specification

- ✓ Nominal Diameter: DN15~300
- ✓ Pressure range: 0~10~16bar
- ✓ Working Temperature: -20℃~+135℃
- ✓ Body: Gray cast-iron, Ductile cast-iron, Cast steel, Stainless steel
- ✓ Sealing: NBR, EPDM, FPM, PTFE
- ✓ Disc: Ductile cast iron, Cast steel, Stainless steel, Aluminum alloy
- ✓ Feature: Double bubble & Zero leakage
- ✓ Medium: Drinking water, sewage, high purity water, seawater, air
- ✓ Connection: Wafer, flanged
- ✓ Control Feature: On-off type, regulated type
- ✓ Manufacturing Standard: GB, ISO, ANSI, DIN

Overall Dimension

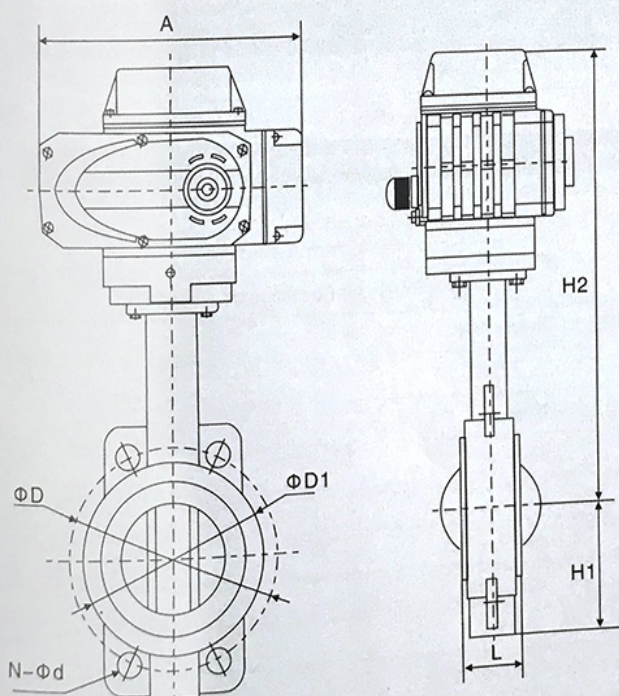

Dimension Sheet

DN	L	H1	H2	A	D	D1	N-Φd	Actuator
50	43	65	292	160	125	99	4-18	KLST-05
65	46	75	303	160	145	118	4-18	KLST-05
80	49	85	342	198	160	132	8-18	KLST-10
100	56	130	353	198	180	156	8-18	KLST-10
125	64	175	400	255	210	184	8-18	KLST-20
150	70	190	419	255	240	211	8-22	KLST-20
200	71	215	447	255	295	265	12-22	KLST-40
250	76	265	479	255	355	319	12-26	KLST-40
300	83	305	555	255	410	370	12-26	KLST-60